

CP520


TECHNICAL SPECIFICATION



Maximum Power	4,500 W
kV Range	50 - 520 kV
kV Accuracy	± 1% of Demand Value
kV Reproducibility	Better than ± 0.05 kV
High Voltage Ripple	<10.0 V/mA with 10m High Voltage Cable
mA Range	0 - 20
mA Accuracy	± 0.5% of Demand Value
mA Reproducibility	Better Than 2µA
Input Voltage	220 V ±10% 47 - 63 Hz
Input Current	27 A at 220 V
Output Connector	R30
Dimensions Cathode mm (W x H X D)	780 x 891 x 412 mm
Dimensions Anode mm (W x H X D)	780 x 885 x 528 mm
Weight kg (Combined)	620 kg
Storage Temperature	-40° C to + 70° C
Operational Temperature	0°C to + 40°C
Relative Humidity	95%
Duty Cycle	100%
Comms	Analogue / RS232 / RS422 / Ethernet

X-RAY

GENERATORS • CONTROLLERS • TUBES

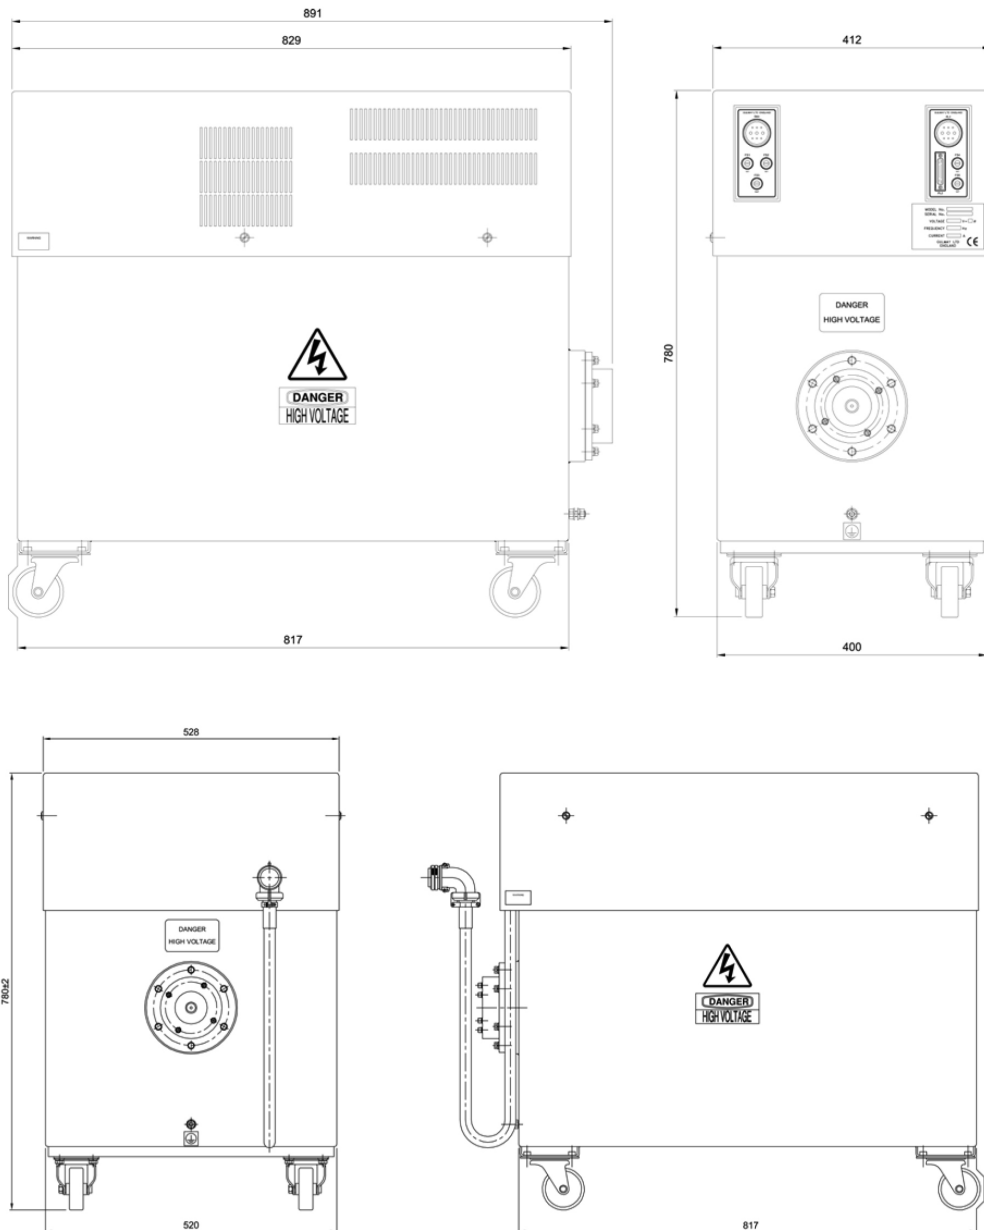

GULMAY Limited
Cyan House, 1 Canada Road, Byfleet, Surrey, KT14 7JL
United Kingdom
Telephone: +44 01932 339850

