

Introduction

The Fuji FP2000 processor is designed to be simple, reliable, and serviceable. The Fuji FP2000 is a fully automatic, variable speed processor that uses quality parts from world-class manufacturers. In this Service Manual, we illustrate the major serviceable components and list their part numbers. Please consult the factory for any parts required that are not shown or described.

Also included are some trouble-shooting guides. The FP2000 is very simple, and the trouble-shooting is equally simple. Schematics are included for your convenience.


Sub-Assembly Detail

ME92D6B 110V Plenum Assembly (Cage shown is not used with IR heaters)


- ME45E2 - Plenum
- ME87C600 – IR 600W Heater (2 per)
- KM82A10 - AMP Plug (2 per)
- KM82A11 & 13 - AMP Pin (2 & 4 per)
- KA58A6 - Grommet (2 per)
- KM41A2 - Tank Plenum Bracket



- Thermostat View Close-Up**
- KA81A5 - Thermostat (2 per)
- KB14A3 - Spacer (4 per)
- KB59B1 - Thermostat Cover (2 per)

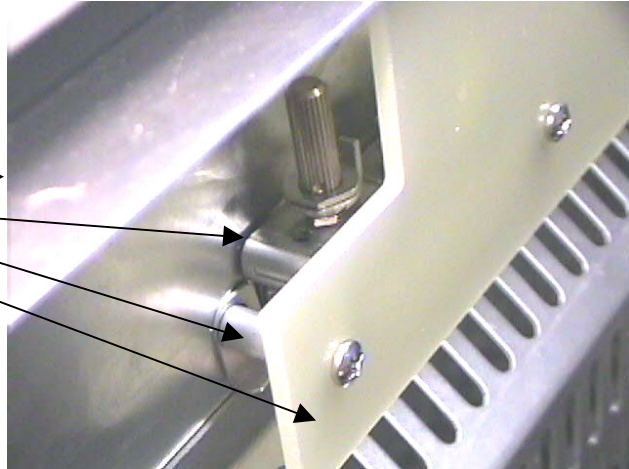

KB92D8 110V Blower Assembly

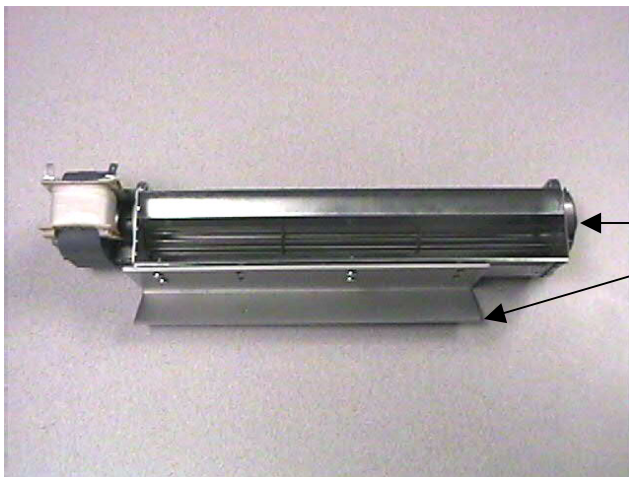


- KL83A3 - 110V Blower
- KB41B1 - Blower Mounting Bracket

KE92A2B

110V Replenishment Pump Assembly


- KJ83A5 - 110V Metering Pump
- KM82A10 - AMP Plug
- KM82A11 - AMP Pin (2 per)

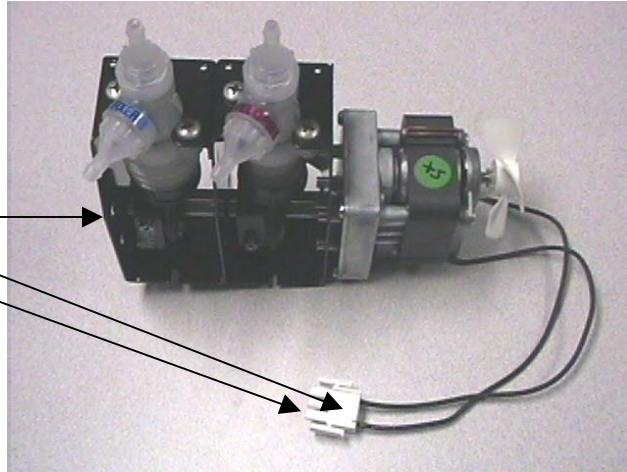

ME92A12 & ME92A13

110V Recirculation Pump Assembly (1 each)

- KB77A2 - Clamp (6 per)
- KB50A9 - Elbow (2per)

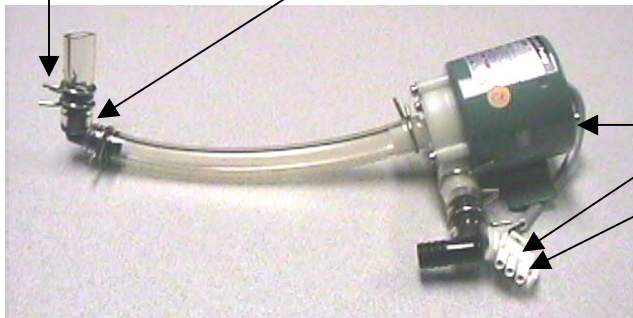


- KE83A1 & RT83A7-110V Recirc Pump
- KM82A10 - AMP Plug
- KM82A11 - AMP Pin (3 per)

GE92D9F


110V Main Drive Motor Assy

- KJ41C2 - Motor Adapter Plate
- KJ92A30 - 30:1 Gearbox
- ME9230 - Drive Motor
- KD33A1 - Pulley
- KL16A1 - Pulley Sleeve
- KJ41C1 - Motor Mounting Bracket
- KM82A10 - AMP Plug
- KM82A11 - AMP Pin (2 per)
- KJ83A42 - Capacitor Cover
- Capacitor (included with drive motor)
- Speed Control Assembly (Not Shown)
- KJ92A21V
- Incl: Motor, Gear Box, Socket, Speed Control Module & Control knob

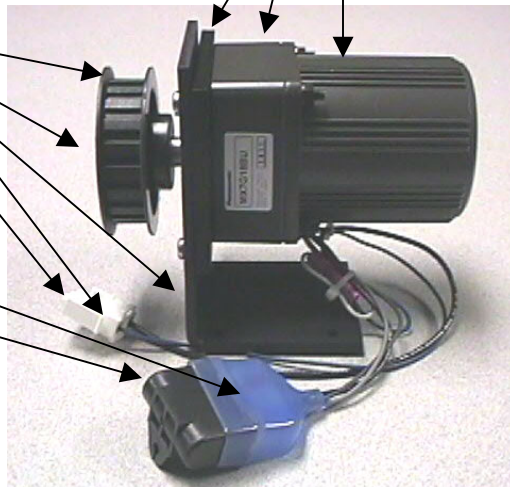

MK92D21



Main Drive Shaft Assembly

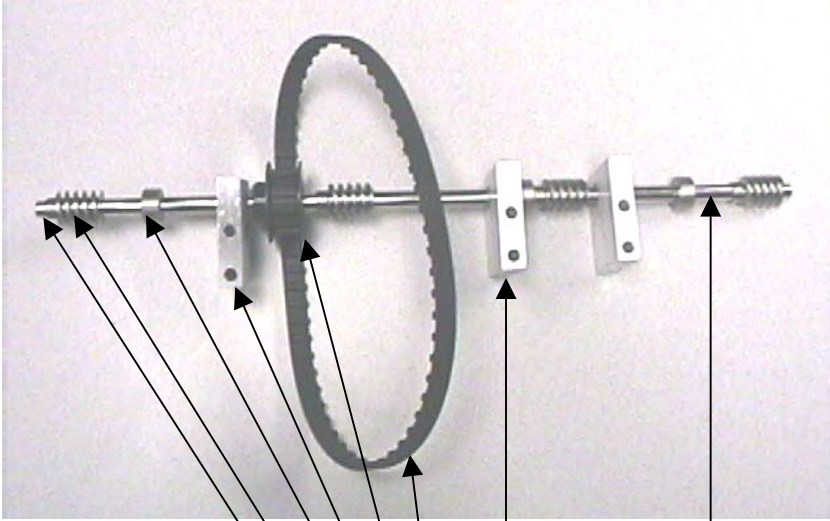

- KB14C1 - Main Drive Shaft
- ME92A9 - Developer Side Bearing Block (2 per)
- KM67A1 - Drive Belt
- KA33A2 - Pulley
- ME92A8 - Dryer Side Bearing Block
- KA16A1 - Collar (3 per)
- KA33A3 - Worm (4 per)
- KA77A5 - Spring Pin (4 per)



ME92C1

Developer Rack Assembly (Short tank rack shown)

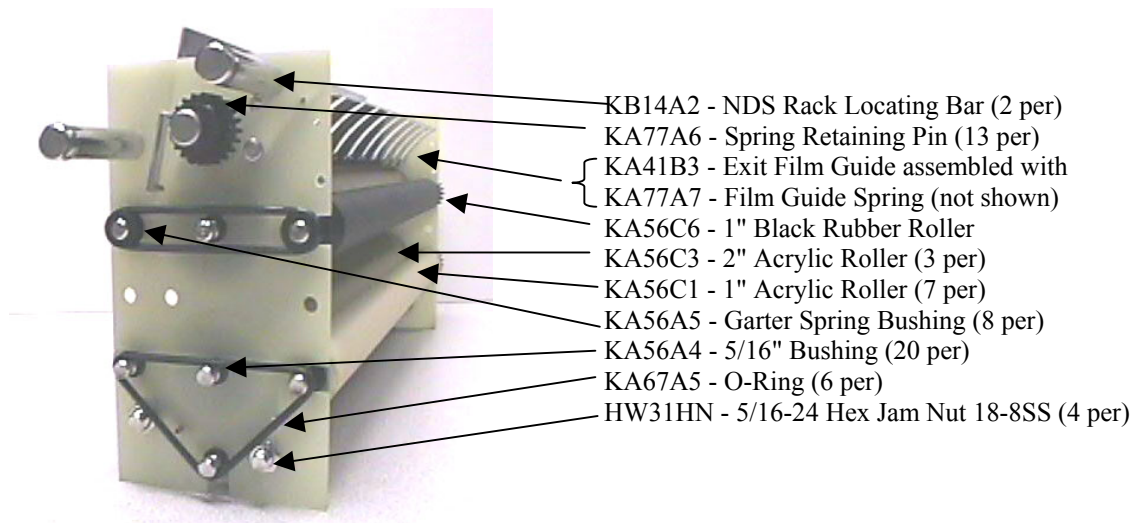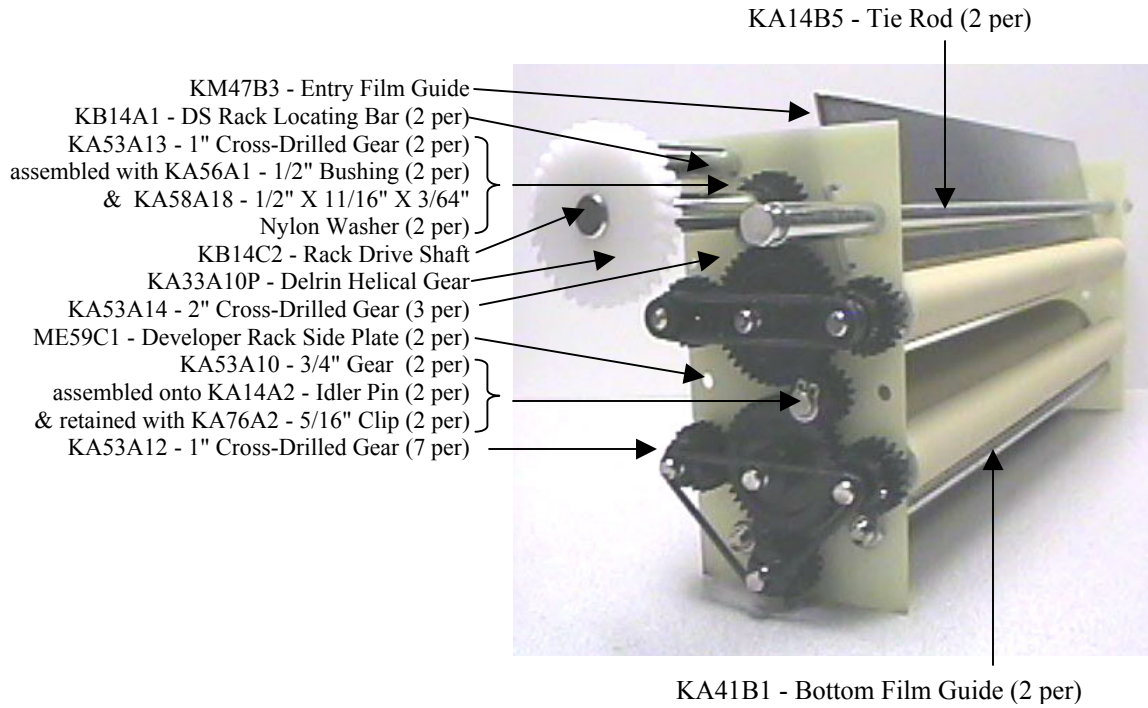



KM92E2

Fixer Rack Assembly (Short tank rack shown)

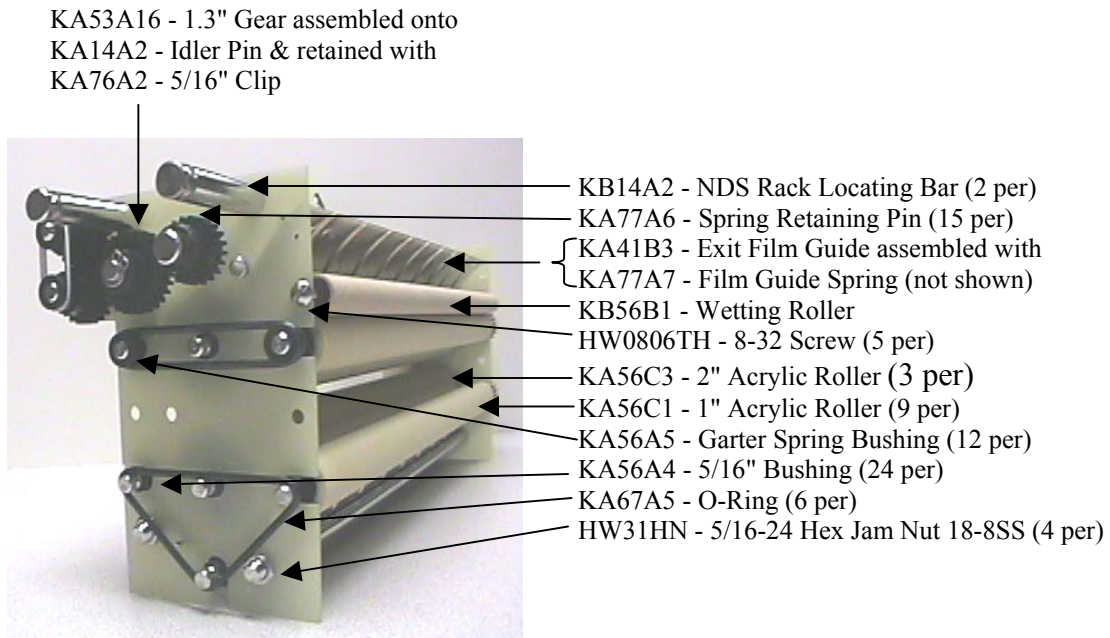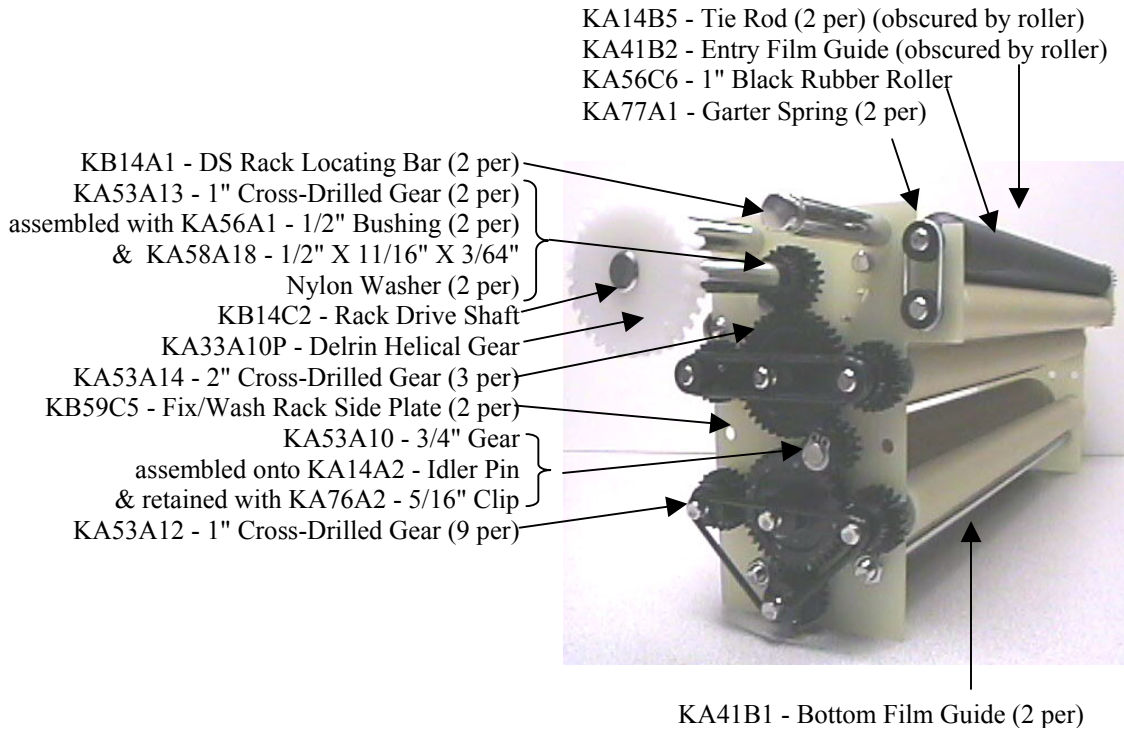


KM92E3

Wash Rack Assembly (Short tank rack shown)

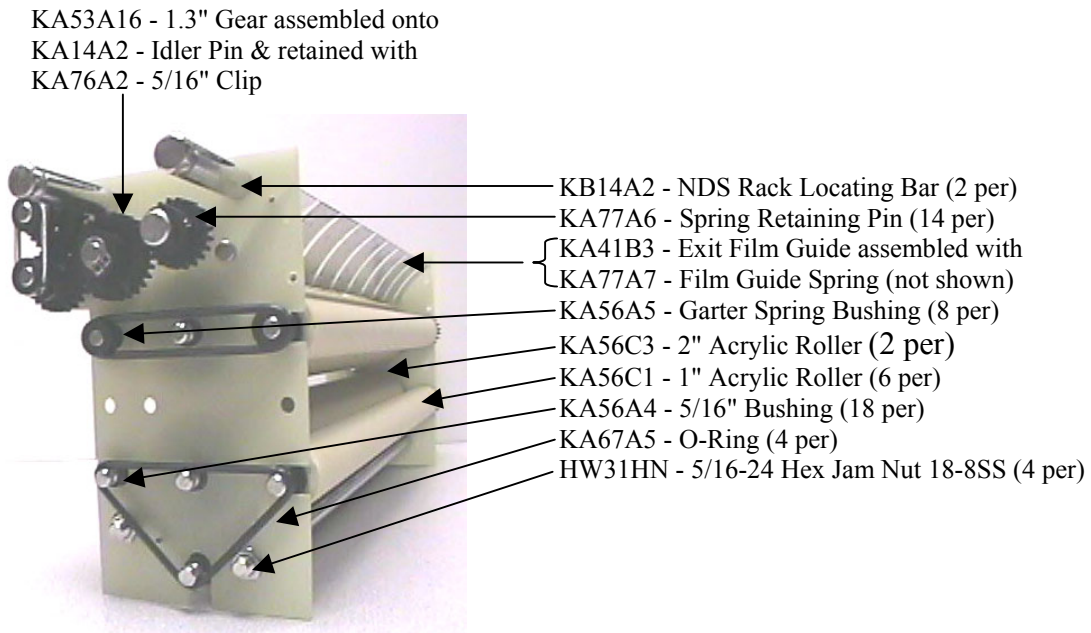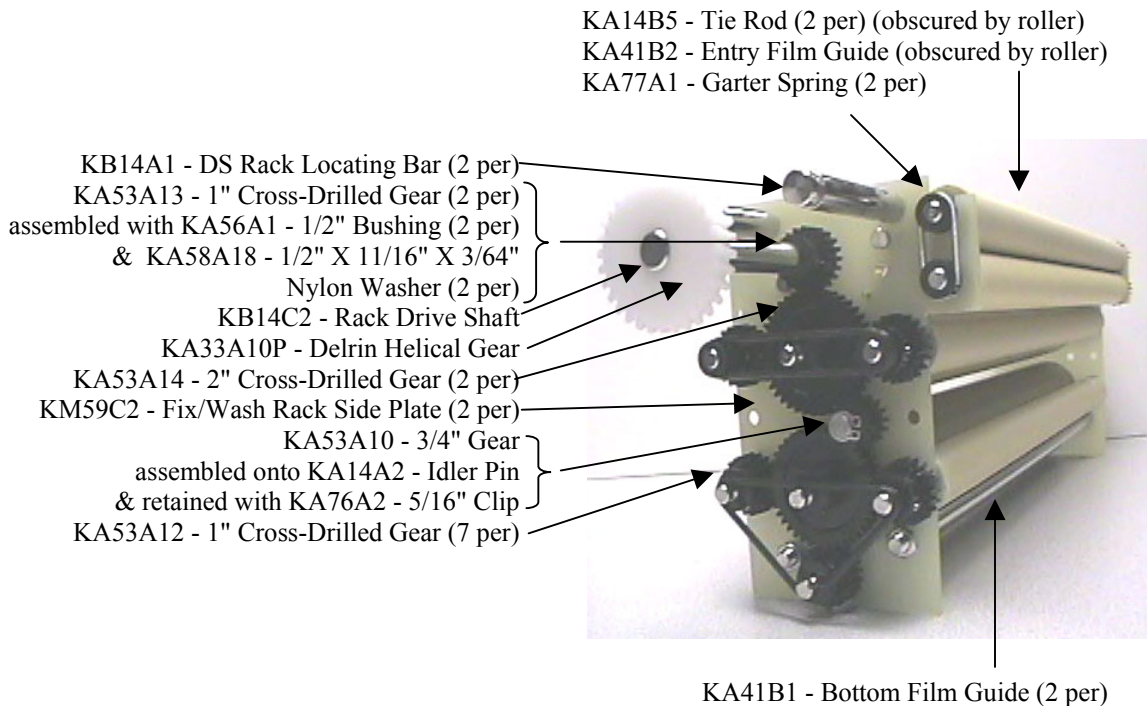


ME92E15

Dryer Rack Assembly – Drive Side (Short tank rack shown)

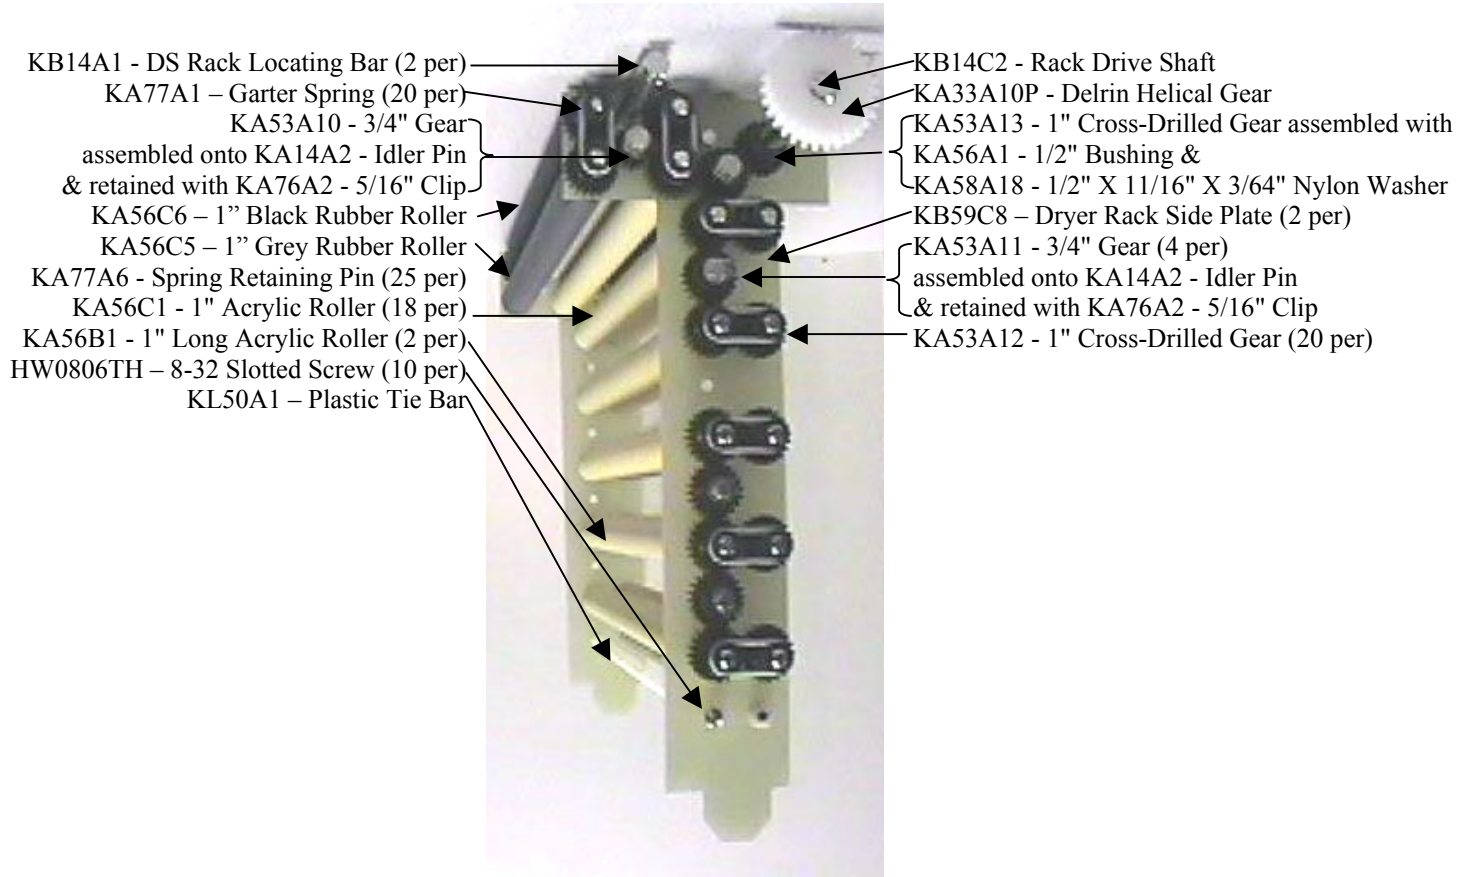


ME92E15 Dryer Rack Assembly – Non Drive Side (Short tank rack shown)

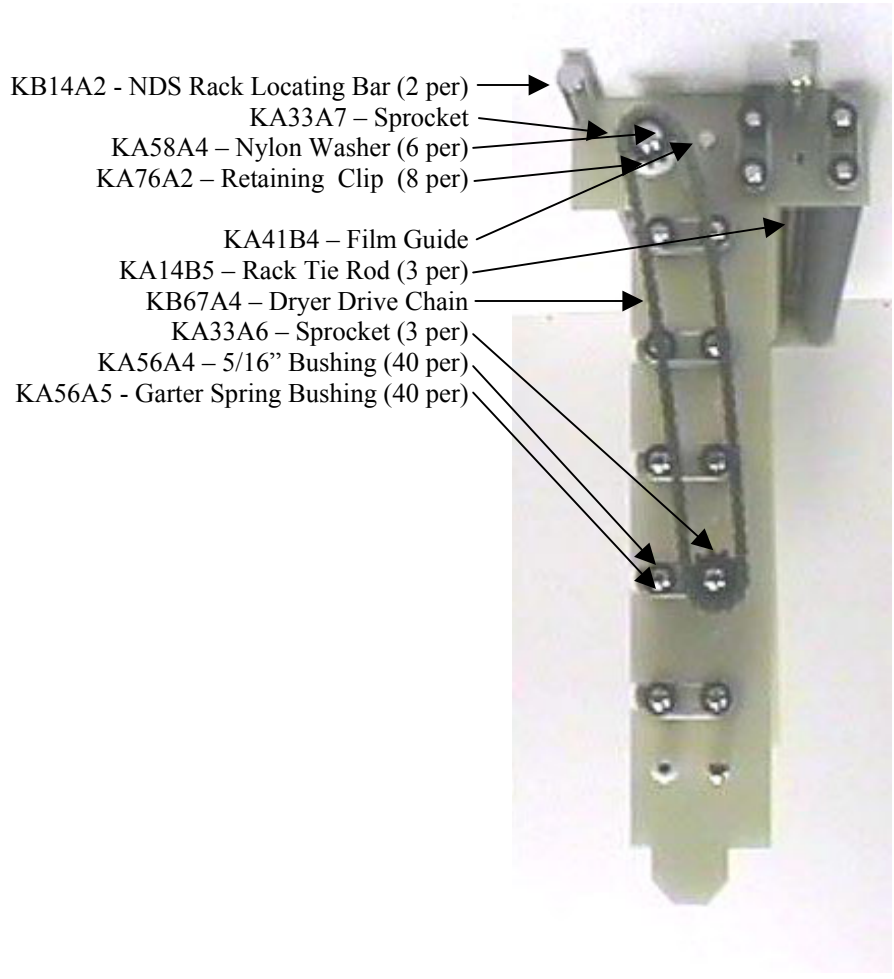

ME41X25



110V Electrical Chassis Assembly

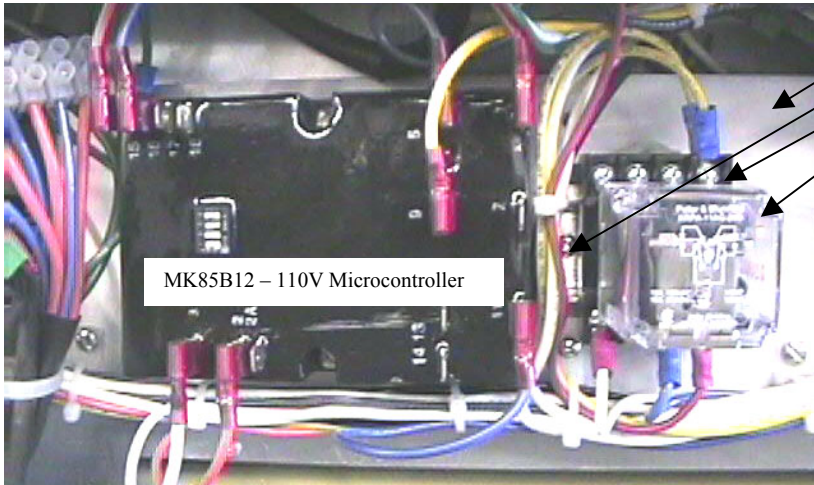

MK85B12 – 110V Microcontroller

- ME41D22 – Chassis
- ME85S5 - Din Rail
- ME85S4 – Relay Base
- FE80A1 – 110V Relay


ME85S24 – Terminal Block

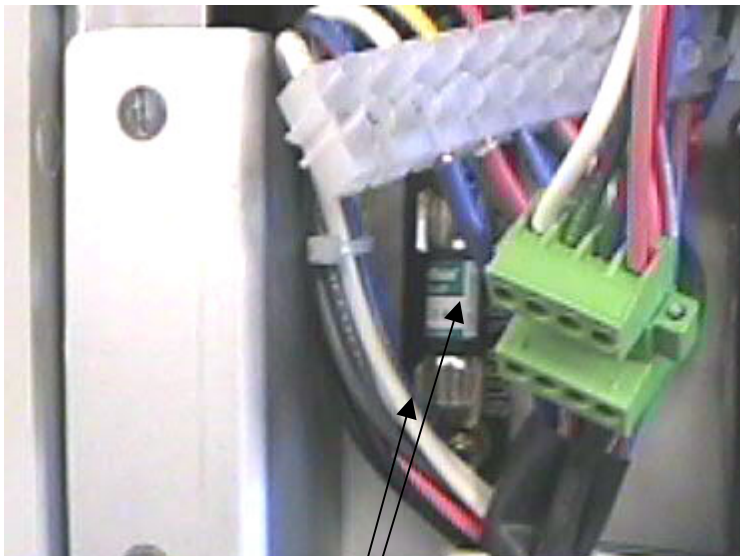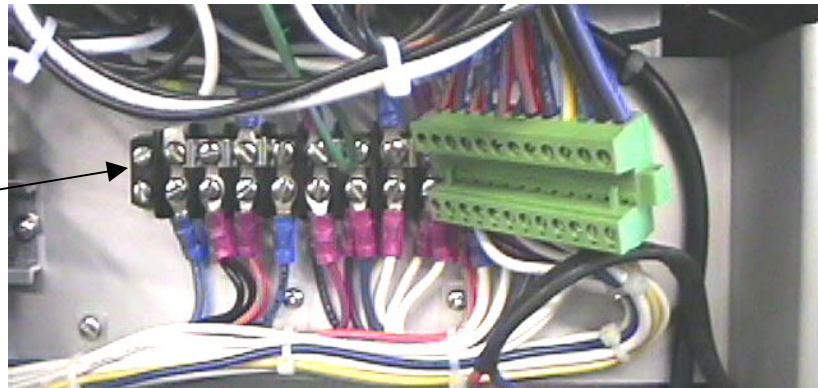

KB81A11 – Fuse Holder
KA81A1 – Fuse

ME92A2


110V Water Solenoid Assembly

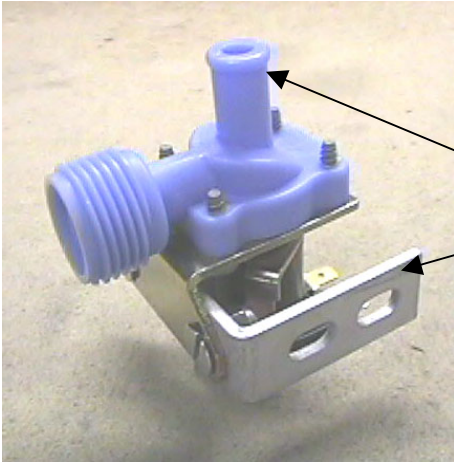

- KE80A2 - Solenoid
- KE41A3 - Bracket


KJ92C2

Drain Tube Assembly

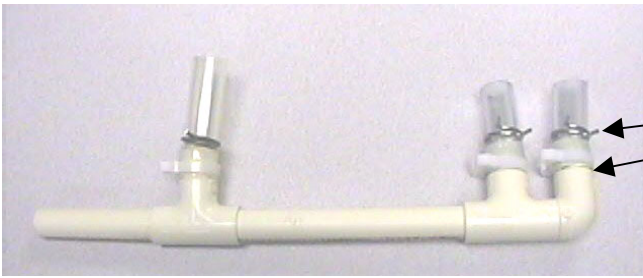

- KB55A5 - Hose Clamp (3 per)
- KB77A3 - SS Hose Clamp (3 per)

Tank Components

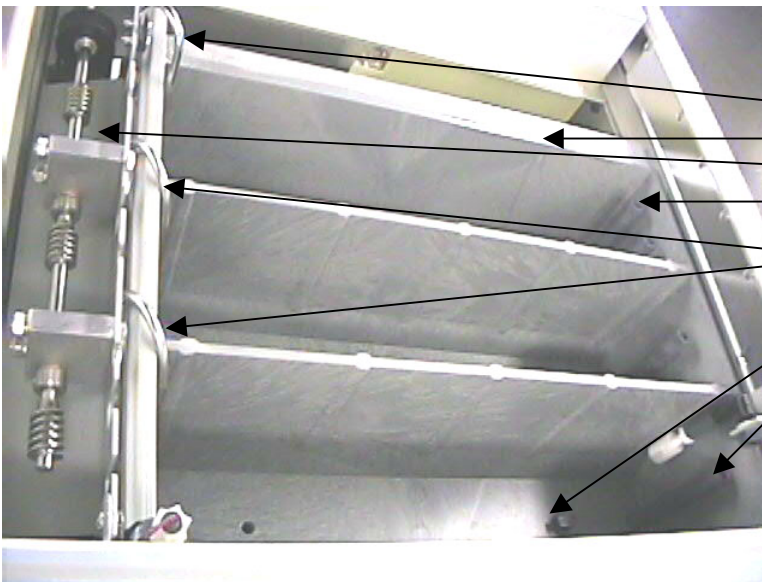

- KE21A2 - Water Spout
- KJ54E3 - Tank
- KE52C1 - Drip Shield
- KJ56B2 - Tall Standpipe (3 per)
- KJ67A2 - O-Rings (2 per standpipe)
- KE21A2 - Replenishment Spouts
- KE52A2 - Flow Diverter (2 per)
- KJ56B3 - Developer Standpipe

Key Stand Alone Parts

<u>P/N</u>	<u>Description</u>
ME54E3	Drive Side Plastic Panel
ME54E5	Non-Drive Side Plastic Panel
ME54E6	Back Plastic Panel
ME54E1	Slotted Top Cover
ME54E2	Light Tight Film Cover
MK85A1	Dryer Rack Cover
KB41D2	Rack Support Bar – Drive Side
KB41D3	Rack Support Bar – Non Drive Side
ME47D1	Electronic Protective Cover – Front
KT92A4	Film Catcher Kit (includes all hardware)
ME54E7	Film Catcher Only
KB92E23	Stand
KA34A2 (4 per)	Leg Leveler with Cap
KA50A4	10 Gallon Tank
KE52A1 (2 per)	Spouts for 10 Gallon Tank
KA55A8	Water Supply Hose
ME92S15	Hand Crank Assembly
ME 92S16	Speed Control Knob Assembly
ME 85S52	Elevated Feed Tray

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
3	5	2	KA55A1	1/4' id CLEAR TUBING	FT	1
4	10	2	KA55A2	1/2' id CLEAR TUBING	FT	0.17
5	15	2	KA55A3	3/4' id CLEAR TUBING	FT	6.33
6	20	2	FE55A2	1/2' id BLUE TUBING	FT	6.2
7	25	2	ME92A20	LEVEL SENSING FLOATER ASSY	EA	1
8		..3	KB50A5	90° ELBOW FITTING - P8-MEB-4	EA	2
9		..3	ME47A11	FLOATER 0763-024	EA	2
10		..3	ME54B11	14 " NPT NUT	EA	2
11		..3	KA58A25	LEVEL SENSOR SPACE WASHER	EA	2
12		..3	KB41D3	RACK SUPPORT BAR - NON DR SIDE	EA	1
13		..3	D11522	AMP PART #1-480319-0	EA	1
14		..3	FE82A7	AMP MALE PIN 60618-1	EA	2
15		..3	KB58A10	3/8" GLUE HEAT SHRINK BLACK	FT	0.2
16	30	2	*KB92D8	BLOWER ASSEMBLY - E PLUS	EA	2
17		..3	KB41B1	BRACKET - BLOWER MOUNTING	EA	1
18		..3	KL83A3	BLOWER 55442.75051 SILVER	EA	1
19		..3	KA14A25	8 * 1/2' SMS ZINC PAN/RND HEAD	EA	4
20	35	2	KB77A2	CLAMP - 3/4' S-12 Corbin type	EA	2
21	40	2	*GE92D9F	FP-2000 VAR SPD DRV ASSEMBLY	EA	1
22		..3	KD33A1	PULLEY - 16 LO 50, 5/8' BORE	EA	1
23		..3	KL16A1	PLY BUSHING - 1/2 X 3/8 16LO50	EA	1
24		..3	KJ41C1	MOTOR MTG BRACKET BLK ANODIZED	EA	1
25		..3	KJ41C2	MOTOR MOUNT ADAPTER PLATE	EA	1
26		..3	HW1006PH	10-32 * 3/8' PANHEAD SLOT MS	EA	4
27		..3	KB52A15	1/4 FEMALE AMP 640903-1-00	EA	3
28		..3	KJ92A21V-F	PKIT 110V VARIABLE SPEED MOTOR KIT 30 GEA	EA	1
29		..3	HW0620PH	PAN MACH SS, 6-32 X 1 1/4	EA	2
30		..3	HW06HN	6-32 HEXNUT 18-8 ss	EA	2
31		..3	KB52A12	RED TERMINAL #PV-18-10R-M	EA	11
32		..3	KB58A7	1/2'ID INSULGRIP HS 105 VW-1 SHRINK	FT	0.17
33		..3	KB58A2	TUBING STRANCO GPO-135 1/4"	FT	0.17
34		..3	KA84F3	LEAD WIRE THHN#14 ORANGE	FT	0.5
35		..3	KA84F9	LEAD WIRE THHN#14 WHITE	FT	2.08
36		..3	RS9.1K25	RESISTOR 9.1K OHM, 1/4WATT	EA	1
37		..3	RS4.7K25	RESISTOR 4.7K OHM, 1/4 WATT	EA	1
38		..3	RS51025	RESISTOR 510 OHM, 1/4 WATT	EA	1
39	45	2	KB77A5	CLAMP - CORBIN HOSE A 111	EA	2
40	50	2	*KB92E2	FIXER RACK ASSEMBLY - E+	EA	1
41		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	5
42		..3	HW31HN	5/16-24 HEX JAM NUT 18-8 SS EL ECTRO	EA	4
43		..3	KA14A2	IDLER PIN - 18-8 ss E/P	EA	3
44		..3	KA14B5	RACK TIE ROD - 18-8 ss	EA	2
45		..3	KA33A10P	HYDEX HELICAL GEAR WHITE	EA	1
46		..3	KA41B1	FILM GUIDE BOTTOM "B1" SILVER	EA	2
47		..3	KA41B2	FILM GUIDE ENTRY "B2" SILVER	EA	1
48		..3	KA41B3	FILM GUIDE EXIT "B3" SILVER	EA	1
49		..3	KA53A10	GEAR - 3/4' GAFITE	EA	2
50		..3	KA53A12	GEAR - 1' GAFITE CROSS DRILLED	EA	9
51		..3	KA53A13	1" GEAR CROSS DRILLED	EA	2
52		..3	KA53A14	GEAR - 2" CROSS DRILLED	EA	3
53		..3	KA53A16	GEAR MODIFIED 20-26 1602ZBLACK	EA	1
54		..3	KA56A1	BUSH 1/2 FLAN USE KA56A1V BLACK	EA	2
55		..3	KA56A4	5-16" BUSH USE KA56A4V BLACK	EA	24

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
56		..3	KA56A5	GART SPRING BUSH USE KA56A5V BLACK	EA	12
57		..3	KA56C1	1' CAST ACRYLIC ROLLER	EA	9
58		..3	KA56C3	2' CAST ACRYLIC ROLLER	EA	3
59		..3	KA58A18	11/16' * 1/2' * 3/64'NYLN WASH	EA	2
60		..3	KA67A5	O-RING #227-70 USE KA67A5V BLACK	EA	6
61		..3	KA76A2	5/16' RETAIN RING 5555-31H S.S	EA	3
62		..3	KA77A1	GARTER SPRING USE KA77A1V SILVER	EA	2
63		..3	KA77A6	SPIRAL PIN #11134 USE KA77A6V SILVER	EA	15
64		..3	KA77A7	FILM GUIDE SPRING	EA	1
65		..3	KB14A1	RACK LOCATING BAR - DRIVE SIDE	EA	2
66		..3	KB14A2	RACK LOCATING BAR - NONDRIVE S	EA	2
67		..3	KB14C2	RACK DRIVE SHAFT	EA	1
68		..3	KB56B1	REWET ROLLER, 5/8'od * 14 7/8'	EA	1
69		..3	KB59C5	FIX/WASH RACK PLATE	EA	2
70	55	2	KB50A9	ELBOW-1/2", P8EUB8 BLACK	EA	1
71	60	2	*KE92A2B	4000M METER PUMP ASSY =KE92A2	EA	1
72		..3	KJ83A5	K+ PUMP 16002-101 BLACK	EA	1
73		..3	KM82A10	AMP 350766-1 PLUG	EA	1
74		..3	KM82A11	AMP 350547-3 PIN	EA	2
75	65	2	HW0606PH	6-32 * 3/8' PANHEAD SLOT 18-8	EA	4
76	70	2	HW06SN	6-32 ELASTIC STOP NUT 18-8 ss	EA	4
77	100	2	*KJ92C2	DRAIN ASSEMBLY - E+, K+	EA	1
78		..3	KB50A2	CPVC TUBE TEE 301-007 3/4"	EA	2
79		..3	KB50A3	309-007 3/4 STREET ELBOW	EA	1
80		..3	KB50A4	030-007 3/4 CPVC/CTS PIPE	FT	1.37
81		..3	KB55A5	HOSE CLAMP 068M 1 1/8"	EA	3
82		..3	KB77A3	CLAMP - 1' S-16 STAINLESS	EA	3
83		..3	KA55A3	3/4' id CLEAR TUBING	IN	0.7
84	110	2	*KM92E3	WASH RACK ASSEMBLY - E+, K+	EA	1
85		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	2
86		..3	HW31HN	5/16-24 HEX JAM NUT 18-8 SS EL ECTRO	EA	4
87		..3	KA14A2	IDLER PIN - 18-8 ss E/P	EA	2
88		..3	KA14B5	RACK TIE ROD - 18-8 ss	EA	2
89		..3	KA33A10P	HYDEX HELICAL GEAR WHITE	EA	1
90		..3	KA41B1	FILM GUIDE BOTTOM "B1" SILVER	EA	2
91		..3	KA41B2	FILM GUIDE ENTRY "B2" SILVER	EA	1
92		..3	KA41B3	FILM GUIDE EXIT "B3" SILVER	EA	1
93		..3	KA53A10	GEAR - 3/4' GAFITE	EA	1
94		..3	KA53A12	GEAR - 1' GAFITE CROSS DRILLED	EA	7
95		..3	KA53A13	1" GEAR CROSS DRILLED	EA	2
96		..3	KA53A14	GEAR - 2" CROSS DRILLED	EA	2
97		..3	KA53A16	GEAR MODIFIED 20-26 1602ZBLACK	EA	1
98		..3	KA56A1	BUSH 1/2 FLAN USE KA56A1V BLACK	EA	2
99		..3	KA56A4	5-16" BUSH USE KA56A4V BLACK	EA	18
100		..3	KA56A5	GART SPRING BUSH USE KA56A5V BLACK	EA	8
101		..3	KA56C1	1' CAST ACRYLIC ROLLER	EA	7
102		..3	KA56C3	2' CAST ACRYLIC ROLLER	EA	2
103		..3	KA58A18	11/16' * 1/2' * 3/64'NYLN WASH	EA	2
104		..3	KA67A5	O-RING #227-70 USE KA67A5V BLACK	EA	4
105		..3	KA76A2	5/16' RETAIN RING 5555-31H S.S	EA	2
106		..3	KA77A1	GARTER SPRING USE KA77A1V SILVER	EA	2
107		..3	KA77A6	SPIRAL PIN #11134 USE KA77A6V SILVER	EA	14
108		..3	KA77A7	FILM GUIDE SPRING	EA	1

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
109		..3	KB14A1	RACK LOCATING BAR - DRIVE SIDE	EA	2
110		..3	KB14A2	RACK LOCATING BAR - NONDRIVE S	EA	2
111		..3	KB14C2	RACK DRIVE SHAFT	EA	1
112		..3	KM59C2	FIX/WASH RACK PLATE	EA	2
113	120	2	*KP92D11	HEAT EXCH ASSY 3000/4000	EA	1
114		..3	KA55A2	1/2' id CLEAR TUBING	FT	0.83
115		..3	KA81A12	AUTO RESET 36TX31-13516 THERMO	EA	1
116		..3	KA81A13	MANUAL RESET 36T31-42902 THERM	EA	1
117		..3	KM82A13	AMP PIN 640309-3 SILVER	EA	2
118		..3	KB50A9	ELBOW-1/2", P8EUB8 BLACK	EA	7
119		..3	KB77A2	CLAMP - 3/4' S-12 Corbin type	EA	24
120		..3	KJ81C1	ALUMINUM HEAT EXCHANGER BLOCK	EA	1
121		..3	KE52A3	1/2' * 1/4' RED ELBOW #P8EUB4	EA	1
122		..3	KB52A30	PAND DNF10-250FI-D 1/4 LUG	EA	4
123		..3	KB52A13	YELLOW RING TERMIN PV10-10R-D YELLOW	EA	2
124		..3	KA84A5	LEAD WIRE -#18 MTW, GREEN	FT	1.25
125		..3	KM82A10	AMP 350766-1 PLUG	EA	1
126		..3	KM82A11	AMP 350547-3 PIN	EA	1
127		..3	KA84B0	LEAD WIRE -#12 THHN BLACK	FT	1.25
128		..3	KA84B1	LEAD WIRE -#12 THHN BROWN	FT	0.66
129		..3	KA84B4	LEAD WIRE -#12 THHN YELLOW	FT	0.5
130		..3	KA84B6	LEAD WIRE -#12 THHN BLUE	FT	1.42
131		..3	FE55A1	1/2' id RED TUBING	FT	1.75
132		..3	FE55A2	1/2' id BLUE TUBING	FT	1.66
133		..3	KB52A12	RED TERMINAL #PV-18-10R-M	EA	1
134	142	2	*ME92A12	RECIRC PUMP ASSM 110V VERT GREEN	EA	1
135		..3	KE83A1	IWAKI MD-6L-115 VERT DEV PUMP 115 VO	EA	1
136		..3	KM82A10	AMP 350766-1 PLUG	EA	1
137		..3	KM82A11	AMP 350547-3 PIN	EA	3
138		..3	KB77A2	CLAMP - 3/4' S-12 Corbin type	EA	6
139		..3	KB50A9	ELBOW-1/2", P8EUB8 BLACK	EA	2
140		..3	KA55A2	1/2' id CLEAR TUBING	FT	1
141	144	2	*ME92A13	RECIRC PUMP ASSM 110V HORIZ GREEN	EA	1
142		..3	KM82A10	AMP 350766-1 PLUG	EA	1
143		..3	KM82A11	AMP 350547-3 PIN	EA	3
144		..3	RT83A7	IWAKI MD-LL-115 HORIZ FIX PUMP CMD-13	EA	1
145		..3	KB77A2	CLAMP - 3/4' S-12 Corbin type	EA	8
146		..3	KB50A9	ELBOW-1/2", P8EUB8 BLACK	EA	2
147		..3	KA55A2	1/2' id CLEAR TUBING	FT	1.32
148		2	*ME92A2	WATER SOLENOID ASSEMBLY	EA	1
149		..3	KE41A3	SOLENOID MOUNTING BRACKET	EA	1
150		..3	KE80A2	SOLENOID VALVE #K-63311-3	EA	1
151		..3	HW2508FH	1/4-20 * 1/2' FLAT,SLOT 18-8ms	EA	2
152		..3	HW25SN	1/4-20 HEXAGON ELASTIC STOP NT	EA	2
153		..3	KA55A2	1/2' id CLEAR TUBING	FT	1.67
154		..3	KB50A9	ELBOW-1/2", P8EUB8 BLACK	EA	1
155		..3	KE52A3	1/2' * 1/4' RED ELBOW #P8EUB4	EA	1
156		..3	KB77A2	CLAMP - 3/4' S-12 Corbin type	EA	4
157	230	2	*ME92D6B	PLENUM ASSY GOLD M	EA	1
158		..3	KA58A6	GROMMET McMASTER #9600K32	EA	2
159		..3	KA81A5	THERMOSTAT w/CLAMP #30000-48	EA	2
160		..3	KB14A3	SPACER KEYSTONE #1847	EA	4
161		..3	KB59B1	THERMOSTAT COVER	EA	2

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
162		..3	KM41A2	TANK PLENUM BRKT (PLAST TANK)	EA	1
163		..3	ME45E2	IR PLENUM 4000 SERIES	EA	1
164		..3	ME87A1	IR HEATER MTG CLIP/ #107002	EA	4
165		..3	ME87C600	INFRARED GOLD 600W 120V TIM125 GLASS	EA	2
166		..3	KM82A10	AMP 350766-1 PLUG	EA	2
167		..3	KM82A11	AMP 350547-3 PIN	EA	2
168		..3	ME59A2	IR MOUNTING BRACKET	EA	2
169		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	2
170		..3	HW0606PH	6-32 * 3/8' PANHEAD SLOT 18-8	EA	8
171		..3	KA14A25	8 * 1/2' SMS ZINC PAN/RND HEAD	EA	8
172		..3	HW0608PH	6-32 * 1/2' PANHEAD MS SLOTTED	EA	4
173		..3	KB31A6	WASHER - ZINC PLATED, 8 INT	EA	4
174		..3	HW06HN	6-32 HEXNUT 18-8 ss	EA	4
175		..3	HW08SN	8-32 ELASTIC STOP NUT 18-8 ss	EA	2
176		..3	KA84B3	LEAD WIRE -#12 THHN ORANGE	FT	4.66
177		..3	KA84B6	LEAD WIRE -#12 THHN BLUE	FT	1.75
178		..3	KA84B7	LEAD WIRE -#12 THHN VIOLET	FT	1.66
179		..3	KA84B8	LEAD WIRE -#12 THHN GREY	FT	1.66
180		..3	KA84A5	LEAD WIRE -#18 MTW, GREEN	FT	1.83
181		..3	KB52A13	YELLOW RING TERMIN PV10-10R-D YELLOW	EA	8
182		..3	KB52A12	RED TERMINAL #PV-18-10R-M	EA	6
183		..3	KM82A13	AMP PIN 640309-3 SILVER	EA	4
184		..3	KB52A8	PAND.PLT2SM 7.5 WIRE TIE	EA	4
185		..3	KB52A6	MOUNTING TAB #MBNY-203-9-D	EA	2
186		..3	ME85S23	IR DRYER HEATER ELEMENT GUARD 316 SS	EA	4
187		..3	HW0604PH	6-32 * 1/4' PANHEAD SLOT MS	EA	8
188		..3	ME58A1	3/16 X 3/32 GROMMET 9600K38	EA	2
189		..3	ME58A2	3/16 X 1/8 GROMMET 9600K45	EA	2
190	235	2	*MK92D21	MAIN DRIVE SHAFT ASSY ST MT	EA	1
191		..3	KA16A1	COLLAR - ss, 3/8' - LSC6	EA	3
192		..3	KA33A3	WORM GEAR - 316 STAINLESS	EA	4
193		..3	KA77A5	SPIROL #11098 USE KA77A5V SILVER	EA	4
194		..3	KB14C1	MAIN DRIVE SHAFT	EA	1
195		..3	KA33A2	PULLEY - 3/8' MPB - #12L050	EA	1
196		..3	*ME92A8	DRYER SIDE MN DR SHFT BEAR BLK	EA	
197		..3	ME92A9	DEV SIDE MN DR SHFT BEAR BLK	EA	2
198	245	2	*ME92E15	DRYER RACK ASM 4000M, 4000MT	EA	1
199		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	10
200		..3	KA14A2	IDLER PIN - 18-8 ss E/P	EA	8
201		..3	KA14B5	RACK TIE ROD - 18-8 ss	EA	3
202		..3	KA33A10P	HYDEX HELICAL GEAR WHITE	EA	1
203		..3	KA33A6	SPROCKET - 5/16' BORE, #25B12	EA	3
204		..3	KA33A7	SPROCKET - 1/2' BORE, #25B12	EA	1
205		..3	KA41B4	FILM GUIDE DRYER "B4" SILVER	EA	1
206		..3	KA53A10	GEAR - 3/4' GAFITE	EA	3
207		..3	KA53A11	GEAR - 1' GAFITE	EA	4
208		..3	KA53A12	GEAR - 1' GAFITE CROSS DRILLED	EA	20
209		..3	KA53A13	1" GEAR CROSS DRILLED	EA	1
210		..3	KA56A1	BUSH 1/2 FLAN USE KA56A1V BLACK	EA	2
211		..3	KA56A4	5-16" BUSH USE KA56A4V BLACK	EA	40
212		..3	KA56A5	GART SPRING BUSH USE KA56A5V BLACK	EA	40
213		..3	KA56B1	1' CAST ACRYLIC D/W ROLLER	EA	2
214		..3	KA56C1	1' CAST ACRYLIC ROLLER	EA	18

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
215		..3	KA58A18	11/16' * 1/2' * 3/64'NYLN WASH	EA	2
216		..3	KA58A4	NYLON WASHER .5 * .875 * .0625	EA	6
217		..3	KA76A2	5/16' RETAIN RING 5555-31H S.S	EA	8
218		..3	KA77A1	GARTER SPRING USE KA77A1V SILVER	EA	20
219		..3	KA77A6	SPIRAL PIN #11134 USE KA77A6V SILVER	EA	25
220		..3	KB14A1	RACK LOCATING BAR - DRIVE SIDE	EA	2
221		..3	KB14A2	RACK LOCATING BAR - NONDRIVE S	EA	2
222		..3	KB14C2	RACK DRIVE SHAFT	EA	1
223		..3	KB59C8	DRYER RACK PLATE, LONG	EA	2
224		..3	KB67A4	DRYER DRIVE CHAIN,#25, 29.5"	EA	1
225		..3	KL50A1	ROLLER BAR - FILM GUIDE	EA	1
226		..3	ME16A2	IR DRYER RACK GUIDE PIN	EA	2
227		..3	HW08FW	#8 FLAT WASHER 18-8 ss	EA	5
228	270	2	*MK92E8	K2000 TOP COVER ASSEMBLY	EA	1
229		..3	ME54E1	TOP COVER, ALL UNITS	EA	1
230		..3	HW0808FH	8-32 * 1/2' FLATHEAD SLOT 18-8	EA	4
231		..3	HW08SN	8-32 ELASTIC STOP NUT 18-8 ss	EA	4
232		..3	HW2508FH	1/4-20 * 1/2' FLAT,SLOT 18-8ms	EA	2
233		..3	HW25SN	1/4-20 HEXAGON ELASTIC STOP NT	EA	2
234		..3	ME41B7	HINGE BRACKET BLK ANODIZ	EA	2
235	345	2	KA55A8	1XINLET 8FXGSNK 8' HOSE	EA	1
236	360	2	ME54E3	Drive side panel, 4000, Deep	EA	1
237	365	2	ME54E5	Non drive side panel 4000,deep	EA	1
238	375	2	HW0808PH	8-32 * 1/2' PANHEAD SLOT MS	EA	3
239	380	2	HW0806PH	8-32 * 3/8' PANHD SLOTTED MS	EA	1
240	385	2	HW2519PH	PAN HD SS 18-8, 1/4X20X1	EA	4
241	390	2	*ME72R3F	FP-2000 FRONT PANEL ASSY, 110V	EA	1
242		..3	ME54E4	Front panel, split, 4000, deep	EA	1
243		..3	KA79A15	BLUE TRIANGLE STICKER BLUE	EA	1
244		..3	ME79D1F	FUJI FP-2000 NAMEPLATE	EA	1
245		..3	HW0816PH	PAN HD M/S 18-8, 8-32X1	EA	4
246		..3	KL85B10	PID TEMP CONTROLLER CAL 32E RED LED	EA	1
247		..3	KB58A12	RNF100- 3/8-BK BLACK	FT	0.5
248		..3	HW0610FH	SCREW- P PAN HD SMS18-8, 6X3/8	EA	2
249		..3	HW06HN	6-32 HEXNUT 18-8 ss	EA	2
250		..3	ME54E41	TEMP CONTROLLER MTING BRACKET	EA	1
251		..3	KB52A8	PAND.PLT2SM 7.5 WIRE TIE	EA	4
252		..3	*ME92A25	TEMP. CONTROL WIRING	EA	
253		...4	P-10389-80	1 CABLE,COPPERFIELD 1801025B0BK BLAC	FT	1.8
254		...4	KM82P6	PHX PLUG 6 POSITION 1825352	EA	1
255		..3	*ME92D20	ON OFF SWITCH ASSY BLACK	EA	1
256		...4	KB58A8	GP-483 FLEX-WEAVE 1/2'	FT	1.41
257		...4	KE81A1	TIGK721-6S-BL-WBL CARLING SWITCH	EA	1
258		...4	KB58A20	SHRINK W/ADH ES2000-NO.3-B8-0-	FT	0.25
259		...4	KA84B4	LEAD WIRE -#12 THHN YELLOW	FT	1.91
260		...4	KA84B6	LEAD WIRE -#12 THHN BLUE	FT	1.91
261		...4	KA84B0	LEAD WIRE -#12 THHN BLACK	FT	1.91
262		...4	KA84B9	LEAD WIRE -#12 THHN WHITE	FT	1.91
263		...4	ME85S41	4-POSITION TERMINAL STRIP WHITE	EA	1
264		..3	KL85E1	NEON INDICATOR 2110A1	EA	2
265		..3	KL85E2	NEON WASHER / SN 1287 SPEEDNUT	EA	2
266		..3	KL85E5	BUZZER 120 V 12S31100	EA	1

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
267		..3	KM82P8	PHX PLUG 8 POS 1825378	EA	1
268		..3	KA84C6	LEAD WIRE MTW #20 BLUE	FT	0.4
269		..3	KA84C4	LEAD WIRE MTW #20 YELLOW	FT	0.4
270		..3	ME41D1B	SPLIT PANEL BRACKET SILVER	EA	1
271	400	2	KE52A2	SOLUTION DIVERTER	EA	2
272	405	2	KE52C1	DRIP SHIELD - E PLUS, K PLUS	EA	1
273	410	2	KJ54E3	PLASTIC CHEMICAL TANK - E+	EA	1
274	415	2	KJ56B2	DRAIN TUBE, PLASTIC MODEL 'E+'	EA	3
275	420	2	KJ56B3	DEVELOPER OVERFLOW PIPE - E+	EA	1
276	425	2	KJ67A2	O-RING, APPLE AS-568-013 EPDM 70 DR	EA	8
277	430	2	KE21A2	CHEM AND WATER SPOUT (PLASTIC) CLEAR	EA	3
278	435	2	KA56A1	BUSH 1/2 FLAN USE KA56A1V BLACK	EA	3
279	440	2	KA56A5	GART SPRING BUSH USE KA56A5V BLACK	EA	3
280	445	2	KA56A4	5-16" BUSH USE KA56A4V BLACK	EA	3
281	450	2	KA77A1	GARTER SPRING USE KA77A1V SILVER	EA	3
282	455	2	KA77A6	SPIRAL PIN #11134 USE KA77A6V SILVER	EA	3
283	460	2	KA67A5	O-RING #227-70 USE KA67A5V BLACK	EA	5
284	465	2	KB77A1	CLAMP - 3/8' HOSE STAINLESS S6	EA	2
285	470	2	KB59A3	1"X4"X.094" FEELER GUAGE	EA	1
286	505	2	FE82A12	20 AMP RECEPTACLE 120V #CR20i	EA	1
287	510	2	ME73D1	FRONT COVER HINGE	EA	1
288	515	2	KA82A101	LINE CORD W/PLUG, 12/3 SO, 12'	EA	1
289	520	2	KE52A4	STRAIN RELIEF - #9P-2	EA	1
290	525	2	KB52A13	YELLOW RING TERMIN PV10-10R-D YELLOW	EA	1
291	530	2	*ME41X25	FP2000 ELECT SUBCHASSIS 120V	EA	1
292		..3	ME41D22	ELECTRICAL SUB CHASSIS	EA	1
293		..3	KB81A11	FUSE BUSSMAN BLOCK #3835-1	EA	1
294		..3	KA81A1	FUSE - BUSSMAN #SC-20	EA	1
295		..3	KB52A7	4' WIRE TIE PLT1M-M WHITE	EA	10
296		..3	HW06SN	6-32 ELASTIC STOP NUT 18-8 ss	EA	8
297		..3	KB52A28	PANDUIT DNFR18-250B-M DISCONT.	EA	12
298		..3	ME85S15	TERMINAL BLOCK, CINCH #12-141	EA	1
299		..3	KB52A11	TERMINAL RING RED - PV18-6RM	EA	29
300		..3	KB52A13	YELLOW RING TERMIN PV10-10R-D YELLOW	EA	4
301		..3	KB52A33	PAND PV14-8R-M RING LUG	EA	12
302		..3	HW0610PH	6-32 * 5/8' PANHEAD SLOT	EA	8
303		..3	HW0620PH	PAN MACH SS, 6-32 X 1 1/4	EA	2
304		..3	HW0606PH	6-32 * 3/8' PANHEAD SLOT 18-8	EA	6
305		..3	HW06HN	6-32 HEXNUT 18-8 ss	EA	6
306		..3	KB52A6	MOUNTING TAB #MBNY-203-9-D	EA	4
307		..3	MK85B12	110V,FP-2000, MC1001226H	EA	1
308		..3	KA84B0	LEAD WIRE -#12 THHN BLACK	FT	1.25
309		..3	KA84A9	LEAD WIRE -#18 THHN WHITE	FT	9.04
310		..3	KA84A6	LEAD WIRE -#18 MTW, BLUE	FT	5.2
311		..3	KA84A7	LEAD WIRE -#18 MTW, VIOLET	FT	3.66
312		..3	KA84A4	LEAD WIRE -#18 MTW, YELLOW	FT	2.2
313		..3	KA84A2	LEAD WIRE -#18 MTW, RED	FT	3.37
314		..3	KA84A8	LEAD WIRE -#18 MTW, GRAY	FT	6.66
315		..3	KA84A3	LEAD WIRE -#18 THHN ORANGE	FT	4.62
316		..3	KA84F4	LEAD WIRE THHN#14 YELLOW	FT	3.12
317		..3	KA84F6	LEAD WIRE THHN#14 BLUE	FT	10

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
318		..3	KA84F9	LEAD WIRE THHN#14 WHITE	FT	5.8
319		..3	KA84A0	LEAD WIRE -#18 THHN BLACK	FT	5.37
320		..3	KA84B4	LEAD WIRE -#12 THHN YELLOW	FT	1.16
321		..3	KA84B6	LEAD WIRE -#12 THHN BLUE	FT	7.85
322		..3	KA82A5	JUMPER - BEAU #1832	EA	9
323		..3	HW0608FH	6-32 * 1/2' FLATHEAD SLOT 18-8	EA	1
324		..3	KB31A5	WASHER, #6 BRONZE INTERNAL LOC	EA	6
325		..3	ME85S24	TERMINAL BLOCK,CINCH 4-140 BLACK	EA	1
326		..3	ME85S36	8 POS WEIDMLR PLUG 162582 BLACK	EA	1
327		..3	KM82C6	6 POS CONN TERM BLOCK PHOENIX# 17545	EA	1
328		..3	*ME92S3	110V EM RELAY ASSEMBLY	EA	1
329		...4	ME85S4	8PIN OCT DPDT RELAY BASE PB27E891	EA	1
330		...4	ME85S5	RELAY DIN RAIL	EA	1
331		...4	FE80A1	RELAY 8 PIN OCT BASE KRPA11AG	EA	1
332		...4	HW0606PH	6-32 * 3/8' PANHEAD SLOT 18-8	EA	2
333		...4	HW08FW	#8 FLAT WASHER 18-8 ss	EA	1
334		..3	ME85S41	4-POSITION TERMINAL STRIP WHITE	EA	1
335		..3	ME85B20	DEV HEATER SOLID STATE RELAY	EA	1
336		..3	KA84E3	LEAD WIRE -#16 THHN, ORANGE	FT	7.46
337		..3	KA84E6	LEAD WIRE -#16 THHN, BLUE	FT	1.09
338		..3	KA84E4	LEAD WIRE -#16 MTW, YELLOW	FT	3.5
339		..3	KA84B3	LEAD WIRE -#12 THHN ORANGE	FT	3.77
340		..3	KA84F0	LEAD WIRE THHN#14 BLACK	FT	3.33
341		..3	KA84B5	LEAD WIRE -#12 THHN GREEN	FT	8.42
342		..3	KB58A7	1/2'ID INSULGRIP HS 105 VW-1 SHRINK	FT	1.83
343		..3	KB58A9	GPO-135 SHRINK TUBING 3/4'	FT	2.74
344		..3	KB58A2	TUBING STRANCO GPO-135 1/4"	FT	2
345		..3	KB52A32	1/4 FEMALE PUSHON TERM #14 WYR	EA	4
346		..3	KM82A10	AMP 350766-1 PLUG	EA	4
347		..3	KM82A8	AMP PLUG #350767-1	EA	7
348		..3	KM82A13-F	AMP PIN # 350923-3	EA	6
349		..3	KB52A13	YELLOW RING TERMIN PV10-10R-D YELLOW	EA	3
350		..3	KM82A9	AMP PIN #350550-3	EA	9
351		..3	KB52A32	1/4 FEMALE PUSHON TERM #14 WYR	EA	2
352		..3	KB52A33	PAND PV14-8R-M RING LUG	EA	2
353		..3	KA84F3	LEAD WIRE THHN#14 ORANGE	FT	6.26
354		..3	KA84F5	LEAD WIRE THHN#14 GREEN	FT	5
355		..3	KB52A12	RED TERMINAL #PV-18-10R-M	EA	2
356		..3	D110121	AMP PLUG #1-480318-0	EA	2
357		..3	FE82A8	AMP FEMALE SOCKET PIN #60619-1	EA	4
358		..3	RT82A4	4 CONDUCTOR #20 CABLE 2093 GRAY	FT	2.83
359		..3	KB58A20	SHRINK W/ADH ES2000-NO.3-B8-0-	FT	0.13
360	595	2	ME54E2	Light Cover (all)	EA	1
361	600	2	ME79A1	BLUE TRIANGLE	EA	1
362	605	2	KE79B1	DAILY START-UP LABEL	EA	1
363	610	2	KM41A3	FRAME TANK BRACKET	EA	1
364	615	2	ME45E1	MAIN FRAME TALL 4000, AUTO	EA	1
365	630	2	KA34A2	LEG LEVELER W/CAP SILV/GRAY	EA	4
366	635	2	HW25SN	1/4-20 HEXAGON ELASTIC STOP NT	EA	2
367	640	2	HW25HN	1/4-20 HEXNUT 18-8 STAINLESS	EA	6
368	645	2	HW04SLW	1/4 SPLIT LOCK WASHER 18-8 ss	EA	10

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
369	650	2	HW2526HC	1/4-20 * 2 1/4' HEXHD CAP SCRW	EA	6
370	655	2	HW04FW	1/4' FLAT WASHER 18-8ss	EA	10
371	660	2	HW0812PH	8-32 * 3/4' PANHEAD SLOT MS	EA	2
372	665	2	KE24A1	WATER IN SPOUT CLAMP	EA	1
373	666	2	HW08FW	#8 FLAT WASHER 18-8 ss	EA	2
374	670	2	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECPOL	EA	16
375	675	2	HW0808TH	8-32 * 1/2' SLOT TRUSSHD 18-8	EA	12
376	680	2	HW0808FH	8-32 * 1/2' FLATHEAD SLOT 18-8	EA	6
377	700	2	HW0608PH	6-32 * 1/2' PANHEAD MS SLOTTED	EA	5
378	705	2	HW08SN	8-32 ELASTIC STOP NUT 18-8 ss	EA	2
379	710	2	HW0616BH	6-32 * 1' BINDING HEAD 18-8 ss	EA	2
380	715	2	HW08HN	8-32 HEXNUT 18-8 ss	EA	29
381	720	2	KB31A6	WASHER - ZINC PLATED, 8 INT	EA	29
382	730	2	FE56A2	WELL NUT E-632	EA	2
383	735	2	HW0610PH	6-32 * 5/8' PANHEAD SLOT	EA	2
384	740	2	FE57A3	TIE WRAP BRACKET #7566K27	EA	4
385	745	2	KB52A8	PAND.PLT2SM 7.5 WIRE TIE	EA	7
386	750	2	KB52A7	4' WIRE TIE PLT1M-M WHITE	EA	5
387	755	2	HW2508HC	1/4-20 * 1/2' HEXHEAD BOLT	EA	10
388	775	2	ME24B1	BACK PANEL HINGE BLK ANODIZ	EA	2
389	780	2	KA50A4	10 GAL. SOLUTION TANK	EA	2
390	785	2	KA55A9	1/4' id BLUE TUBING 3/8' od	FT	9.5
391	790	2	KA55A7	1/4' id RED TUBING 3/8' od	FT	9.5
392	800	2	KB21A3	REPLENISHMENT TUBE EXTENSION	EA	2
393	805	2	KB52B1	FLOATING LID - 10.6 GAL TANK	EA	1
394	810	2	KB77A4	CLAMP - CORBIN HOSE A18S	EA	4
395	845	2	*KT92A4	FUTURA SERIES FILM CATCHER KIT	EA	1
396		..3	ME54E7	NEW FILM CATCHER - E+, K+	EA	1
397		..3	ME54C1	FILM BRACES - 2/FILM CATCHER	EA	2
398		..3	HW0610PHPS	T SCREWS	EA	6
399		..3	ME54D5	FILM CATCHER SUPPORT BRACKET	EA	1
400		..3	ME16A1	FILM CATCHER SUPPORT PIN	EA	2
401		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	2
402		..3	KB31A6	WASHER - ZINC PLATED, 8 INT	EA	2
403		..3	MK85A1	AIR FLOW NOZZLE	EA	1
404	860	2	KB41D2	RACK SUPPORT BAR - DR SIDE	EA	1
405	870	2	ME54E6	BACK PANEL, 4000, Deep	EA	1
406	875	2	HW04FW	1/4' FLAT WASHER 18-8ss	EA	4
407	880	2	ME85S28	EPDM 1/4" RBR WASHER 90130A029	EA	4
408	885	2	*ME92A1-H	FEED SWITCH ASSY - DEEP TANK	EA	1
409		..3	D11522	AMP PART #1-480319-0	EA	1
410		..3	FE82A7	AMP MALE PIN 60618-1	EA	2
411		..3	KB81A8-H	HAMLIN SENSOR # 59150-531 24" LEADS	EA	1
412		..3	KB81A9-H	HAMLIN MAGNETIC SW # 57150-000	EA	1
413		..3	ME41C1	SWITCH SUPPORT BRACKET	EA	1
414		..3	KB58A20	SHRINK W/ADH ES2000-NO.3-B8-0-	FT	1
415		..3	KM52C1	FILM SWITCH ACTUATOR	EA	1
416		..3	HW0606PH	6-32 * 3/8' PANHEAD SLOT 18-8	EA	1
417		..3	HW06HN	6-32 HEXNUT 18-8 ss	EA	1
418		..3	KB31A5	WASHER, #6 BRONZE INTERNAL LOC	EA	1
419		..3	KA58A16	4-40 * 3/4' PANHD SLOT BLK NYL	EA	2

	A	B	C	D	E	F
1		1	*FP-2000	FUJI FP-2000 5-12 MIN PROCESSR (4000M)	EA	
2	Line Item	Level	Part Number	Description	UOM	Quantity
420		..3	KA58A17	4-40 HEXNUT BLACK NYLON	EA	2
421	890	2	HW1420SC	ADJUSTING KNOB	EA	1
422	920	2	ME79D1FR	FUJI FP-2000 REAR NAMEPLATE	EA	1
423	925	2	ME47D1	ELECTRONIC PROTECTIVE COVER	EA	1
424	930	2	ME79A2	MADE IN USA LABEL	EA	1
425	935	2	KA79A2	SERIAL NUMBER LABEL	EA	1
426	940	2	*ME92C1	E2000 DEVELOPER RACK ASSEMBLY	EA	1
427		..3	HW0806TH	8-32 * 3/8' TRUSSHEAD MS SLOTD ELECP	EA	2
428		..3	HW31HN	5/16-24 HEX JAM NUT 18-8 SS EL ECTRO	EA	4
429		..3	KA14A2	IDLER PIN - 18-8 ss E/P	EA	2
430		..3	KA14B5	RACK TIE ROD - 18-8 ss	EA	2
431		..3	KA33A10P	HYDEX HELICAL GEAR WHITE	EA	1
432		..3	KA41B1	FILM GUIDE BOTTOM "B1" SILVER	EA	2
433		..3	KA41B3	FILM GUIDE EXIT "B3" SILVER	EA	1
434		..3	KA53A10	GEAR - 3/4' GAFITE	EA	2
435		..3	KA53A12	GEAR - 1' GAFITE CROSS DRILLED	EA	7
436		..3	KA53A13	1" GEAR CROSS DRILLED	EA	2
437		..3	KA53A14	GEAR - 2" CROSS DRILLED	EA	3
438		..3	KA56A1	BUSH 1/2 FLAN USE KA56A1V BLACK	EA	2
439		..3	KA56A4	5-16" BUSH USE KA56A4V BLACK	EA	20
440		..3	KA56C1	1' CAST ACRYLIC ROLLER	EA	7
441		..3	KA56C3	2' CAST ACRYLIC ROLLER	EA	3
442		..3	KA58A18	11/16' * 1/2' * 3/64'NYL N WASH	EA	2
443		..3	KA76A2	5/16' RETAIN RING 5555-31H S.S	EA	2
444		..3	KA77A6	SPIRAL PIN #11134 USE KA77A6V SILVER	EA	13
445		..3	KA77A7	FILM GUIDE SPRING	EA	1
446		..3	KB14A1	RACK LOCATING BAR - DRIVE SIDE	EA	2
447		..3	KB14A2	RACK LOCATING BAR - NONDRIVE S	EA	2
448		..3	KB14C2	RACK DRIVE SHAFT	EA	1
449		..3	KM47B2	DEVELOPER RACK SPLASH GUARD	EA	1
450		..3	KM47B3	DEVELOPER RACK FILM GUIDE	EA	1
451		..3	ME59C1	DEVELOPER PLATE FUTURA 2000 E	EA	2
452		..3	KA56A5	GART SPRING BUSH USE KA56A5V BLACK	EA	8
453		..3	KA67A5	O-RING #227-70 USE KA67A5V BLACK	EA	6